

IME MODEL 108CG-R, BRASS CABLE GLANDS

PROTECTION DEGREE

NEMA 4X, IP 68 (20 Metres for 7 Days)

MATERIAL

NICKEL PLATED BRASS

HERMETIC SEAL

NITRILE RUBBER

O' RING

NITRILE RUBBER


AMBIENT TEMPERATURE

-40°C to 100°C



DIMENSIONAL DETAILS

CODE	"T" (Thread)	"D" (Cable)	"L1"	"L2"	"G" (A/F)
T01	1/2" NPT	6-12	22	13	22
T02	1/2" NPT	5-9	22	13	22
T03	3/4" NPT	13-18	25	15	30
T04	3/4" NPT	9-16	25	15	30
T05	1" NPT	19-25	29	19	40
T06	1" NPT	13-20	29	19	40
M01	M16 x 1.5	4-8	22	10	22
M02	M16 x 1.5	2-6	22	10	22
M03	M20 x 1.5	6-12	22	10	22
M04	M20 x 1.5	5-9	22	10	22
M05	M25 x 1.5	13-18	25	12	30
M06	M25 x 1.5	9-16	25	12	30
M07	M32 x 1.5	18-25	29	12	40
M08	M32 x 1.5	13-20	29	12	40
M09	M40 x 1.5	22-32	35	15	50
M10	M40 x 1.5	20-26	35	15	50
M11	M50 x 1.5	32-38	37	15	57
M12	M50 x 1.5	25-31	37	15	57
M13	M63 X 1.5	37-44	38	15	64
M14	M63 X 1.5	29-35	38	15	64

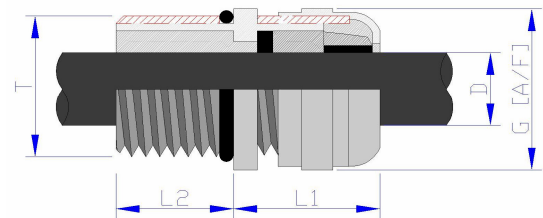

All dimensions are in inches (mm) unless otherwise specified.

ORDERING INFORMATION

Model	Description
108CG	Stainless Steel Cable Glands
	Code Material of Construction
	R Nickel Plated Brass
	Code Size of Thread & Cable
	T01 1/2" NPT 6-12
	T02 1/2" NPT 5-9
	T03 3/4" NPT 13-18
	T04 3/4" NPT 9-16
	T05 1" NPT 19-25
	T06 1" NPT 13-20
	M01 M16 x 1.5 4-8
	M02 M16 x 1.5 2-6
	M03 M20 x 1.5 6-12
	M04 M20 x 1.5 5-9
	M05 M25 x 1.5 13-18
	M06 M25 x 1.5 9-16
	M07 M32 x 1.5 18-25
	M08 M32 x 1.5 13-20
	M09 M40 x 1.5 22-32
	M10 M40 x 1.5 20-26
	M11 M50 x 1.5 32-38
	M12 M50 x 1.5 25-31
	M13 M63 X 1.5 37-44
	M14 M63 X 1.5 29-35
108CG	R T02 ← Typical Model Number

All dimensions are in inches (mm) unless otherwise specified.